



AL NOUF AUTO

TYRES & ACCESSORIES



SEAM TYRE
ENGINEERED IN JAPAN

CATALOGUE

PCR/LTR/SAND TYRES/BATTERIES



Lorem ipsum dolor sit amet, qu
ix ei idque intellegat referen



Lorem ipsum dolor sit amet, qu
ix ei idque intellegat referen



Lorem ipsum dolor sit amet, qu
ix ei idque intellegat referen



www.seamtyre.com



COMPANY PROFILE

Al Nouf Auto tyres is a leading United Arab Emirates tyre distribution company which focuses on the daily distribution of premium brand tires of the following segments;

Passenger Cars, SUVs, 4x4 Cars, Light trucks and other trucks.

We are an experienced company with over fourteen years in business; first opened in 2004 in the Emirates of Sharjah, UAE. Since that time we have grown to be premier tyre distributor, importer and exporter in the United Arab Emirates. We have developed our business relations with European, Middle Eastern, North American, African, Asian and Gulf countries.

Al Nouf tyres provides full line of tyres to meet the needs of virtually all customers from everyday motorists to the most demanding high performance, off-road and motorsports enthusiasts. We promise to continue offering our customers great quality products at most affordable prices with friendly people to assist you with your purchase of tyres.

Al Nouf Auto Tyres is the owner of SEAMTYRE brand in worldwide. We are also distributor of premium brand tyres such as Michelin, Continental, Dunlop, Goodyear, Bridgestone, Falken, Firestone, Pirelli, Yokohama, Nexen, Hankook, GT, Nankang etc.

We would welcome the opportunity deliver the best products to meet your needs and look forward to earn your trust as the best supplier of tyres.

OUR BRANDS



\$20 MILLION INVESTMENTS IN CHINESE FACTORIES

Global Reach & Market Leadership

Al Nouf Auto Tyres operates through 50 agencies worldwide, delivering premium tyres across diverse markets. With a strong distribution network and a commitment to quality, we thrive in competitive environments, continuously expanding our footprint to meet growing demand. Our strategic partnerships and customer-centric approach ensure sustained growth and industry leadership.



1.5 MILLION TYRES SOLD IN 2024

Sales Milestone

With an annual average of **1.5 million tyres** sold globally, Al Nouf Auto Tyres demonstrates unmatched market penetration and customer trust. This consistent performance reflects our commitment to quality, affordability, and strategic distribution excellence.





GT MAX
2/3



PEARLY (PCR/SUV)
4/5



PREMIUM PLUS
6/7



GOOD RUN
8



BF
9



LANDTOUR
10/11



GRANDTOUR
12/13



NEXA
14/15



MAXTOUR
16



PRIMA
17



GRAND ATZ2
18



CROUSER T528
19



BIRD STONE C890
20



GRAND PTZ
21

PATTERNS INTRODUCTION



LIBERTY HT
22



LIBERTY HP
23



LIBERTY MAX
24



SAND TYRE
25



GRANDSNOW
26



SNOWPEARLY
27



SE306 (SAND TYRE)
28



SHAHIN
29



T-REX (T02)
30



SM VAN 365
31



ST3
32



TABOUQ
33



R632
34



SS1
35



SS2
36



DESERT TIRES
37



E7
37



JUPITER
38



GALAXY
39



KASMAS
40



PREMIUM SILENT 1
41



RUBICON
42



ST LANDTOUR
43



ST GRANDTOUR
43



STC NEXA
44



LTX LANDTOUR
44



ST MAX270
45



ST MAX071
46



PREMIUM ST49
46



ST MAX247
47



GRANDTOUR GT
47



PREMIUM ST52
48



GT MAX



① Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.

② Continuous tread blocks on both shoulder give great support to enhance the stability when cornering. The closed shoulders deliver excellent quiet ride.

③ Continuous solid center ribs and lateral tread blocks connected by rib-in-chain enhance steering stability, decrease block deformation and reduce energy loss.

UTQG: 420 AA 13"
UTQG: 560 AA 14" AND ABOVE

④ Special tread compound delivers excellent grip on both dry and wet roads and offers longer mileage.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
*145/70R12 69T	BLK	4.5	7.3	9.0	150	509	300/44	E	C	68
*155/70R12 73T	BLK	4.5	7.3	9.0	157	523	300/44	E	C	68
155/65R13 73T	BLK	5.0	7.8	9.2	157	540	300/44	E	C	68
155/70R13 75T	BLK	4.5	7.3	9.2	157	548	300/44	E	C	68
155/80R13 79T	BLK	4.5	7.3	9.2	157	578	300/44	E	C	68
165/65R13 77T	BLK	5.0	7.3	9.2	170	544	300/44	E	C	68
165/70R13 79T	BLK	5.0	7.3	9.2	170	562	300/44	E	C	68
165/80R13 83T	BLK	4.5	7.3	9.2	165	594	300/44	E	C	68
175/60R13 77H	BLK	5.0	7.3	9.2	177	540	300/44	E	C	68
175/70R13 82T	BLK	5.0	7.3	9.2	177	576	300/44	E	C	68
185/70R13 86T	BLK	5.5	7.3	9.2	189	590	300/44	E	C	68
*155/65R14 75H	BLK	4.5	7.3	9.2	154	557	300/44	E	C	68
*165/60R14 75H	BLK	5.0	7.3	9.2	170	554	300/44	E	C	68
165/65R14 79H	BLK	5.0	7.3	9.2	170	570	300/44	E	C	68
165/70R14 81H	BLK	5.0	7.3	9.2	170	588	300/44	E	C	68
*165/70R14 85TXL	BLK	5.0	7.0	9.0	170	588	340/50	E	C	69
175/60R13 77H	BLK	5.0	7.3	9.2	177	540	300/44	E	C	68
175/65R14 82H	BLK	5.0	7.3	9.2	177	584	300/44	E	C	68
175/65R14 86TXL	BLK	5.0	7.3	9.2	177	584	340/50	E	C	68
175/70R14 84H	BLK	5.0	7.3	9.2	177	602	300/44	E	C	68
175/70R14 88TXL	BLK	5.0	7.3	9.2	177	602	340/50	E	C	68
185/60R14 82H	BLK	5.5	7.5	9.4	189	578	300/44	E	C	68
185/65R14 86H	BLK	5.5	7.5	9.4	189	609	300/44	E	C	68
185/70R14 88H	BLK	5.5	7.5	9.4	189	616	300/44	E	C	68
195/60R14 86H	BLK	6.0	7.5	9.4	201	590	300/44	E	C	69
195/70R14 91H	BLK	6.0	7.5	9.4	201	630	300/44	E	C	69
205/60R14 88H	BLK	6.0	7.8	9.8	209	602	300/44	E	C	69
205/70R14 95H	BLK	6.0	7.8	9.8	209	644	300/44	E	C	69
215/70R14 96H	BLK	6.5	8.0	10	220	654	300/44	E	C	70
*175/55R15 77H	BLK	5.5	7.5	9.4	182	573	300/44	E	C	68
*175/60R15 81H	BLK	5.0	7.5	9.4	177	591	300/44	E	C	68
175/65R15 84H	BLK	5.0	7.5	9.4	177	609	300/44	E	C	68
185/55R15 82H	BLK	6.0	7.5	9.4	194	585	300/44	E	C	68
185/55R15 82V	BLK	6.0	7.5	9.4	194	585	300/44	E	C	68
185/60R15 84H	BLK	5.5	7.5	9.4	189	603	300/44	E	C	68
185/60R15 88HXL	BLK	5.5	7.5	9.4	189	603	340/50	E	C	68
185/65R15 88H	BLK	5.5	7.5	9.4	189	621	300/44	E	C	68
195/60R15 88H	BLK	6.0	7.5	9.4	201	615	300/44	E	C	69
195/60R15 88V	BLK	6.0	7.5	9.4	201	615	300/44	E	C	69
195/65R15 91H	BLK	6.0	7.5	9.0	201	635	300/44	E	C	69
195/65R15 91V	BLK	6.0	7.5	9.4	201	635	300/44	E	C	69
195/65R15 95HXL	BLK	6.0	7.5	9.4	201	635	340/50	E	C	69
205/60R15 91V	BLK	6.0	7.8	9.8	209	627	300/44	E	C	69
205/60R15 91H	BLK	6.0	7.8	9.8	209	627	300/44	E	C	69
205/65R15 94H	BLK	6.0	7.8	9.8	209	647	300/44	E	C	69
205/65R15 94V	BLK	6.0	7.8	9.8	209	647	300/44	E	C	69
205/70R15 96H	BLK	6.0	7.8	9.8	209	669	300/44	E	C	69
215/60R15 94H	BLK	6.5	8.0	10.0	218	638	300/44	E	C	70
215/65R15 96H	BLK	6.5	8.0	10.0	221	661	300/44	E	C	70
215/70R15 98H	BLK	6.5	8.0	10.0	221	683	300/44	E	C	70
225/70R15 100H	BLK	6.5	8.0	10.0	228	697	300/44	E	C	70
205/55R16 91V	BLK	6.5	7.8	9.8	214	632	300/44	E	C	69
205/60R16 92V	BLK	6.0	7.8	9.8	209	652	300/44	E	C	69
205/60R16 92H	BLK	6.0	7.8	9.8	209	652	300/44	E	C	69
205/60R16 96HXL	BLK	6.0	7.8	9.8	209	652	340/50	E	C	69
215/55R16 93H	BLK	7.0	7.8	10.0	226	642	300/44	E	C	70
215/60R16 95V	BLK	6.5	8.0	10.0	221	664	300/44	E	C	70
215/60R16 99HXL	BLK	6.5	8.0	10.0	221	664	340/50	E	C	70
215/65R16 98H	BLK	6.5	8.0	10.0	221	686	300/44	E	C	70
225/60R16 98H	BLK	6.5	8.0	10.0	228	676	300/44	E	C	70
235/60R16 100H	BLK	7.0	8.0	10.0	240	688	300/44	E	C	70

* New Developing Sizes
The labeling information is subject to change without notice.

PEARLY (PCR/SUV)



① Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.



② Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.



③ Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimizes contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.



UTQG: 300 A A

④ Special tread compound delivers excellent grip on both dry and wet roads and reduce the rolling resistance to save oil and protect environment.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
195/50R15 82V	BLK	6.0	8.0	10.0	201	577	300/44	E	C	70
195/55R15 85V	BLK	6.0	8.0	10.0	201	595	300/44	E	C	70
195/45R16 84VXL	BLK	6.5	8.0	10.0	195	582	340/50	E	C	70
195/55R16 91VXL	BLK	6.0	8.0	10.0	190	619	340/50	E	C	70
205/45ZR16 87WXL	BLK	7.0	8.0	10.0	206	590	340/50	E	C	70
205/50ZR16 91WXL	BLK	6.5	8.0	10.0	214	612	340/50	E	C	70
205/55ZR16 94WXL	BLK	6.5	8.0	10.0	214	632	340/50	E	C	70
215/55ZR16 97WXL	BLK	7.0	8.0	10.0	226	642	340/50	E	C	71
225/55ZR16 99WXL	BLK	7.0	8.0	10.0	233	680	340/50	E	C	71
205/40ZR17 84WXL	BLK	7.5	8.0	10.0	212	596	340/50	E	C	70
205/45ZR17 88WXL	BLK	7.0	8.0	10.0	206	616	340/50	E	C	70
205/50ZR17 93WXL	BLK	6.5	8.0	10.0	214	638	340/50	E	C	70
215/45ZR17 91WXL	BLK	7.0	8.0	10.0	213	626	340/50	E	C	71
215/50ZR17 95WXL	BLK	7.5	8.0	10.0	226	648	340/50	E	C	71
215/55ZR17 98WXL	BLK	7.0	8.0	10.0	226	668	340/50	E	C	71
225/45ZR17 94WXL	BLK	7.5	8.0	10.0	225	634	340/50	E	C	71
225/50ZR17 98WXL	BLK	8.0	8.0	10.0	233	658	340/50	E	C	71
225/55ZR17 101WXL	BLK	7.0	8.0	10.0	233	680	340/50	E	C	71
235/45ZR17 97WXL	BLK	7.5	8.0	10.0	236	644	340/50	E	C	71
235/50ZR17 100WXL	BLK	7.5	8.0	10.0	245	668	340/50	E	C	71
235/55ZR17 103WXL	BLK	7.5	8.0	10.0	245	690	340/50	E	C	71
245/45ZR17 99WXL	BLK	8.0	8.0	10.0	243	652	340/50	E	C	72
215/35ZR18 84WXL	BLK	7.5	8.0	10.0	218	607	340/50	E	C	71
225/40ZR18 92WXL	BLK	8.5	8.0	10.0	230	637	340/50	E	C	71
225/45ZR18 95WXL	BLK	7.5	8.0	10.0	225	659	340/50	E	C	71
235/40ZR18 95WXL	BLK	8.5	8.0	10.0	241	645	340/50	E	C	71
235/45ZR18 98WXL	BLK	8.0	8.0	10.0	240	667	340/50	E	C	71
235/50ZR18 101WXL	BLK	7.5	8.0	10.0	243	693	340/50	E	C	71
245/40ZR18 97WXL	BLK	8.5	8.0	10.0	248	653	340/50	E	C	72
245/45ZR18 100WXL	BLK	8.0	8.0	10.0	243	677	340/50	E	C	72
255/35ZR18 94WXL	BLK	9.0	7.2	9.0	260	635	340/50	E	C	70
255/40ZR18 99WXL	BLK	9.0	8.0	10.0	263	661	340/50	E	C	72
*225/35ZR19 88WXL	BLK	8.0	8.0	10.0	232	642	340/50	E	C	71
235/35ZR19 91WXL	BLK	8.5	8.0	10.0	241	647	340/50	E	C	71
245/35ZR19 93WXL	BLK	8.5	8.0	10.0	248	655	340/50	E	C	72
*245/40ZR19 98WXL	BLK	8.5	8.0	10.0	251	679	340/50	E	C	72
*245/45ZR19 102WXL	BLK	8.0	7.2	9.0	243	703	340/50	E	C	71
*255/35ZR19 96WXL	BLK	9.0	7.2	9.0	260	661	340/50	E	C	72
225/35ZR20 90WXL	BLK	8.0	7.2	9.0	230	641	340/50	E	C	71
225/35ZR20 93WXL	BLK	8.0	8.0	10.0	230	666	340/50	E	C	72
245/30ZR20 90WXL	BLK	8.5	8.0	10.0	247	657	340/50	E	C	72
245/30ZR20 97WXL	BLK	8.5	8.0	10.0	247	657	340/50	E	C	72
245/35ZR20 95WXL	BLK	8.5	8.0	10.0	248	680	340/50	E	C	72
*245/45ZR20 103WXL	BLK	8.0	8.0	10.0	243	728	340/50	E	C	72
255/35ZR20 97WXL	BLK	9.0	8.0	10.0	260	686	340/50	E	C	72
255/35ZR20 102WXL	BLK	9.0	7.2	9.0	260	686	340/50	E	C	72
*255/45ZR20 103WXL	BLK	8.5	7.2	9.0	255	738	340/50	E	C	72
*245/30ZR22 92WXL	BLK	8.5	8.0	10.0	247	708	340/50	E	C	72
*255/30ZR22 95WXL	BLK	9.0	8.0	10.0	259	713	340/50	E	C	72
*255/30ZR24 97WXL	BLK	9.0	8.0	10.0	255	767	340/50	E	C	72
*275/25ZR24 96WXL	BLK	10.0	8.0	10.0	277	751	340/50	E	C	72
215/45ZR18 93WXL	BLK	10.0	8.0	10.0	277	751	340/50	E	C	72

PREMIUM PLUS



① Four wide circumferential tread grooves and lateral grooves with fine sipes provide efficient water evacuation, outstanding wet performance.

② Continuous block patterns on shoulder enhance the ride stability at high speed cornering. The rim protector will protect wheels from curb damage.

③ Continuous outside tread blocks enhance excellent performance and precise control when cornering at high speed. The special rib segment design optimizes contact pressure distribution, improve road contact area and provide precise control. The serrated groove walls absorb noise and deliver a quieter ride.

④ Special tread compound delivers excellent grip on both dry and wet roads and reduces the rolling resistance to save oil and protect environment.

UTQG: 300AA 18" AND ABOVE
UTQG: 420AA 17"



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
205/45ZR17 88WXL	BLK	7.0	8.5	10.8	240	738	340/50	E	C	71
215/45ZR17 91WXL	BLK	7.0	8.5	10.8	248	750	300/44	E	C	72
225/45ZR18 95WXL	BLK	8.0	8.5	10.8	260	738	340/50	E	C	72
235/45ZR18 98WXL	BLK	8.0	8.5	10.8	260	764	300/44	E	C	72
205/50ZR17 93WXL	BLK	7.0	8.5	10.8	272	776	300/44	E	C	72
215/50ZR17 95WXL	BLK	7.0	8.5	10.8	265	737	340/50	E	C	72
235/50ZR18 101WXL	BLK	8.0	8.5	10.8	265	737	340/50	E	C	72
255/55ZR18 109YXL	BLK	8.0	8.5	10.8	265	739	340/50	E	C	72
255/55ZR19 111WXL	BLK	9.0	8.5	10.8	265	763	340/50	E	C	72
235/55ZR19 105WXL	BLK	9.0	8.5	10.8	277	774	340/50	E	C	72
235/55ZR17 103WXL	BLK	7.0	8.5	10.8	278	728	340/50	E	C	72
215/55ZR17 98WXL	BLK	7.0	8.5	10.8	273	756	340/50	E	C	72
225/50ZR17 98WXL	BLK	7.0	8.5	10.8	284	810	340/50	E	C	72
225/55ZR17 101WXL	BLK	7.0	8.5	10.8	279	838	340/50	E	C	72
235/45ZR17 97WXL	BLK	7.0	8.5	10.8	297	794	340/50	E	C	72
225/40ZR18 92WXL	BLK	8.0	8.5	10.8	301	739	340/50	E	C	72
235/40ZR18 95YXL	BLK	8.0	8.5	10.8	301	769	340/50	E	C	72
245/40ZR18 97YXL	BLK	8.0	8.5	10.8	301	745	340/50	E	C	72
245/45ZR18 100YXL	BLK	8.0	8.5	10.8	271	759	340/50	E	C	72
255/35ZR18 94YXL	BLK	8.0	8.5	10.8	290	803	340/50	E	C	72
245/40ZR19 98YXL	BLK	9.0	8.5	10.8	313	833	340/50	E	C	72
275/35ZR19 100YXL	BLK	9.0	8.5	10.8	303	816	340/50	E	C	72
265/35ZR18 97YXL	BLK	8.0	8.5	10.8	301	824	340/50	E	C	72
215/55ZR18 99WXL	BLK	8.0	8.5	10.8	313	728	340/50	E	C	72
245/35ZR21 96YXL	BLK	11.0	8.5	10.8	277	756	340/50	E	C	72
275/30ZR21 98YXL	BLK	11.0	8.5	10.8	278	810	340/50	E	C	72
275/40ZR21 107YXL	BLK	11.0	8.5	10.8	273	838	340/50	E	C	72
275/45ZR21 110YXL	BLK	11.0	8.5	10.8	284	794	340/50	E	C	72
315/35ZR21 111YXL	BLK	11.0	8.5	10.8	279	739	340/50	E	C	72
315/40ZR21 115YXL	BLK	11.0	8.5	10.8	297	769	340/50	E	C	72
255/55ZR20 110WXL	BLK	10.0	8.5	10.8	301	745	340/50	E	C	72
265/40ZR22 106YXL	BLK	11.5	8.5	10.8	301	759	340/50	E	C	72
275/40ZR22 108YXL	BLK	11.5	8.5	10.8	301	803	340/50	E	C	72
235/45ZR18	EV BLK	8.0	8.5	10.8	271	833	340/50	E	C	72
235/40ZR19 98YXL	EV BLK	9.0	8.5	10.8	290	816	340/50	E	C	72
255/45ZR20 96WXL	EV BLK	10.0	8.5	10.8	313	824	340/50	E	C	72
235/50ZR20 105WXL	EV BLK	10.0	8.5	10.8	303	803	340/50	E	C	72
265/45ZR20	EV BLK	10.0	8.5	10.8	301	833	340/50	E	C	72
255/45ZR20	EV BLK	10.0	8.5	10.8	313	816	340/50	E	C	72
235/35ZR20	EV BLK	10.0	8.5	10.8	313	824	340/50	E	C	72

GOODRUN



UTQG: 420 AA



① Perfect handling performance and good cornering performance.



② Asymmetric pattern shape, optimized variable pitch pattern design, provide quiet ride environment.



③ Nice driving pleasure comes from strong tread and soft sidewall.



④ Silica tread compound for low rolling resistance and good wet grip.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
185/60R14 82H	BLK	5.5	7.5	9.4	189	578	300/44	-	-	-
195/55R15 85H	BLK	6.0	7.4	9.0	201	595	300/44	-	-	-
195/55R15 85V	BLK	6.0	7.8	9.8	201	595	300/44	-	-	-
195/60R15 88H	BLK	6.0	7.8	9.8	201	615	300/44	-	-	-
195/60R15 88V	BLK	6.0	7.8	9.8	201	615	300/44	-	-	-
205/55R16 91H	BLK	6.5	7.8	9.8	214	632	300/44	-	-	-
205/55R16 91V	BLK	6.5	7.8	9.8	214	632	300/44	-	-	-
215/55R16 93H	BLK	7.0	8.0	10.0	226	642	300/44	-	-	-
215/60R16 95H	BLK	6.5	8.0	10.0	221	664	300/44	-	-	-
225/60R16 98H	BLK	6.5	8.0	10.0	228	676	300/44	-	-	-
235/60R16 100H	BLK	7.0	8.0	10.0	240	688	300/44	-	-	-

BF



① Three main zigzag grooves and aggressive pattern design provide outstanding traction on all kinds of road conditions.



② High void ratio and open shoulder offer excellent resistance to aquaplaning and self-cleaning performance.



③ The block tread design with multiple-sipes provide outstanding off-road traction and reduce tread damage on off-road condition. Special casing profile and solid shoulder pattern enhance the max traction and cornering performance.



④ Jointless Nylon band and strong structure design provide strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
LT31X10.50R15 C 109Q	RBL	8.5	13.5	16.8	268	775	350/51	-	-	-
*LT33X12.50R15 C 108Q	RBL	10.0	13.5	16.8	320	838	350/51	-	-	-
*LT35X12.50R15 C 113Q	RBL	10.0	14.5	18.2	326	890	350/51	-	-	-
LT235/85R16 E 120/116Q	RBL	6.5	13.5	16.8	235	806	550/80	-	-	-
LT245/75R16 E 120/116Q	RBL	7.0	13.5	16.8	248	771	550/80	-	-	-
LT265/75R16 E 123/120Q	RBL	7.5	13.5	16.8	267	804	550/80	-	-	-
LT285/75R16 E 126/123Q	RBL	8.0	13.5	16.8	286	834	550/80	-	-	-
*LT35X12.50R17 LT 121Q	BLK	10.0	13.5	17.0	318	877	450/65	-	-	-
LT265/70R17 E 121/118Q	RBL	8.0	13.5	16.8	272	804	550/80	-	-	-
LT285/70R17 E 121/118Q	RBL	8.5	13.5	16.8	284	831	550/80	-	-	-

* New Developing Sizes
The labeling information is subject to change without notice.

LANDTOUR



UTQG: 420 A A



① Four wide circumferential tread grooves deliver the ride stability and offer excellent performance on wet conditions. Improved grooves and bead profile design offer better ride stability, endurance and handling performance.



② The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. Continuous tread blocks on both shoulder give great support to enhance the ride stability when cornering.



③ Variable pitch pattern and solid center ribs improve the ride stability, reduce the noise and deliver a comfortable ride.



④ High-density sipes with special compound deliver a smooth ride and improve traction on dry and wet roads. Jointless Nylon band and strong structure design provided the strong carcass to enhance the reliability and durability.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
235/70R16 106H	BLK	7.0	8.5	10.8	240	736	300/44	E	C	71
245/70R16 107H	BLK	7.0	8.5	10.8	248	750	300/44	E	C	71
245/70R16 111HXL	BLK	7.0	8.5	10.8	248	750	340/50	E	C	71
255/65R16 109H	BLK	7.5	8.5	10.8	262	737	300/44	E	C	71
255/70R16 111H	BLK	7.5	8.5	10.8	260	764	300/44	E	C	71
265/70R16 112H	BLK	8.0	8.5	10.8	272	778	300/44	E	C	71
275/70R16 114H	BLK	8.0	8.5	10.8	279	792	300/44	E	C	72
215/60R17 96H	BLK	6.5	8.5	10.8	221	680	300/44	E	C	71
215/65R17 99H	BLK	6.5	8.5	10.8	221	710	300/44	E	C	71
225/60R17 99H	BLK	6.5	8.5	10.8	228	702	300/44	E	C	71
225/65R17 102H	BLK	6.5	8.5	10.8	228	724	300/44	E	C	71
235/60R17 102H	BLK	7.0	8.5	10.8	240	714	300/44	E	C	71
235/60R17 106HXL	BLK	7.0	8.5	10.8	240	714	300/44	E	C	71
235/65R17 104H	BLK	7.0	8.5	10.8	240	738	300/44	E	C	71
245/65R17 107H	BLK	7.0	8.5	10.8	248	750	340/50	E	C	71
245/65R17 111HXL	BLK	7.0	8.5	10.8	248	750	300/44	E	C	71
255/65R17 110H	BLK	7.5	8.5	10.8	260	764	300/44	E	C	71
265/65R17 112H	BLK	8.0	8.5	10.8	272	776	300/44	E	C	71
265/70R17 115H	BLK	8.0	8.5	10.8	272	804	300/44	E	C	71
275/65R17 115H	BLK	8.0	8.5	10.8	279	791	300/44	E	C	72
285/65R17 116H	BLK	8.5	8.5	10.8	292	802	300/44	E	C	72
235/55R18 104HXL	BLK	7.5	8.5	10.8	245	715	340/50	E	C	71
235/60R18 107HXL	BLK	7.0	8.5	10.8	240	739	300/44	E	C	71
265/60R18 110H	BLK	8.0	8.5	10.8	272	775	300/44	E	C	71
285/60R18 116H	BLK	8.5	8.5	10.8	290	802	300/44	E	C	72

GRANDTOUR



UTQG: 500A B (ONLY P SERIES)



① Four main zigzag grooves and rough lateral blocks provide excellent traction on all kinds of road conditions.



② The open shoulder grooves prevent aquaplaning with enhanced wet grip performance and provide excellent water evacuation. The white letter styling provides an artistic image.



③ The block tread design with multiple-sipes provides outstanding off-road traction and reduces tread damage on off-road condition.



④ Jointless Nylon band and strong structure design provide strong carcass to enhance the reliability and durability. Special tread compound and wide footprint enhance tread life and deliver excellent braking on wet and dry roads.



Sizes Description	Sidewall description	RIM	MM	1/32*	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
P235/75R15 109SXL	OWL	6.5	9.00	11.4	235	733	340/50	-	-	-
P215/70R16 99T/100T	RBL	6.5	9.00	11.4	221	768	300/44	-	-	-
P225/70R16 101T	OWL	6.5	9.00	11.4	228	722	300/44	-	-	-
P225/70R16 103T	OWL	6.5	8.5	11.0	228	722	300/44	-	-	-
P235/70R16 104T/106T	OWL	7.0	9.00	11.4	240	736	300/44	-	-	-
P245/70R16 106T/107T	OWL	7.0	9.00	11.4	248	750	300/44	-	-	-
P245/70R16 111SXL	OWL	7.0	9.0	11.0	248	750	340/50	-	-	-
P255/70R16 111T/109T	OWL	7.5	9.50	12.0	260	764	300/44	-	-	-
P265/70R16 111T/112T	OWL	8.0	9.50	12.0	272	778	300/44	-	-	-
P275/70R16 114T	OWL	8.0	9.50	12.0	279	792	300/44	-	-	-
P255/65R17 110T	OWL	7.5	9.50	12.0	259	762	300/44	-	-	-
P265/65R17 110T/112T	OWL	7.0	9.50	12.0	272	776	300/44	-	-	-
P265/70R17 113T/115T	OWL	8.0	9.50	12.0	272	804	300/44	-	-	-
P275/65R17 115T	OWL	8.0	9.50	12.0	279	791	300/44	-	-	-
LT235/75R15 C 104/101S	OWL	6.5	11.5	14.4	233	733	350/51	-	-	-
31X10.50R15LT C 109S	OWL	8.5	11.5	14.4	268	775	350/51	-	-	-
215R15C 112/110S	RBL	6.0	9.0	11.0	218	724	450/65	-	-	-
245/75R15C 109/107S	RBL	7.0	11.5	14.0	248	749	375/55	-	-	-
LT215/85R16 E 115/112S	OWL	6.0	11.5	14.4	216	772	550/80	-	-	-
LT225/75R16 E 115/112S	OWL	6.0	11.5	14.4	223	744	550/80	-	-	-
LT235/85R16 E 120/116S	RBL	6.5	12.0	15.0	235	806	550/80	-	-	-
LT245/75R16 E 120/116S	OWL	7.0	11.5	14.4	248	774	550/80	-	-	-
LT265/75R16 E 123/120S	OWL	7.5	12.0	15.0	267	804	550/80	-	-	-
LT285/75R16 D 122/119S	OWL	8.0	12.0	15.0	286	834	450/65	-	-	-
205R16C C 110/108S	RBL	5.5	11.5	14.4	200	738	375/55	-	-	-
185/75R16C D 104/102S	RBL	5.0	9.00	11.4	184	684	475/69	-	-	-
LT245/75R17 E 121/118S	OWL	7.0	12.0	15.0	248	800	550/80	-	-	-
LT265/70R17 E 121/118S	OWL	8.0	12.0	15.0	272	804	550/80	-	-	-
P265/70R15 112T	OWL	7.0	12.0	15.0	248	800	550/80	-	-	-
LT275/70R18 125/122S	OWL	8.0	12.0	15.0	272	804	550/80	-	-	-

* New Developing Sizes
The labeling information is subject to change without notice.

NEXA



① Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.



② Continuous tread patterns on shoulder and solid shoulder ribs provide responsive handling and even wear.



③ Variable pitch patterns and multi-knife-cut tread patterns reduce vibration to offer a comfort and quiet ride.



④ Reinforced structure and special abrasion-resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
*155R12C 88/86Q-8PR	BLK	4.5	8.0	10.0	157	550	450/65	E	C	70
*155R13C 85/83Q-6PR	BLK	4.5	8.0	10.0	157	578	450/65	E	C	70
*155R13C 90/88Q-8PR	BLK	4.5	8.0	10.0	157	578	450/65	E	C	70
*165/70R14C 89/87R-6PR	BLK	5.0	8.0	10.0	170	588	375/55	E	C	71
*175/65R14C 90/88T-6PR	BLK	5.0	8.4	11.0	177	584	375/55	E	C	71
185R14C 102/100R	BLK	5.5	8.5	10.8	188	650	450/65	E	C	71
195R14C 106/104R	BLK	5.5	8.5	10.8	198	666	450/65	E	C	71
195R15C 106/104R	BLK	5.5	8.5	10.8	198	693	450/65	E	C	71
195/70R15C 104/102R	BLK	6.0	9.0	11.4	201	655	450/65	E	C	71
*205/70R15C 106/104R	BLK	6.0	9.0	11.4	209	669	450/65	E	C	71
*215/65R15C 104/102R	BLK	6.5	8.8	11.0	221	661	375/55	E	C	71
*215/70R15C 109/107R	BLK	6.5	9.5	11.8	221	683	450/65	E	C	72
225/70R15C 112/110R	BLK	6.5	9.5	11.8	228	697	450/65	E	C	72
*175/75R16C 101/99R	BLK	5.0	9.0	11.4	175	668	475/69	E	C	71
185/75R16C 104/102R	BLK	5.0	9.0	11.4	184	684	475/69	E	C	71
195/65R16C 104/102R	BLK	6.0	9.0	11.4	201	660	475/69	E	C	71
195/75R16C 107/105R	BLK	5.5	9.0	11.4	196	698	475/69	E	C	71
205/65R16C 107/105T	BLK	6.0	9.0	11.4	209	672	475/69	E	C	71
*205/75R16C 110/108R	BLK	5.5	9.0	11.4	203	714	475/69	E	C	71
215/65R16C 109/107T	BLK	6.5	9.5	11.8	221	664	475/69	E	C	72
215/70R16C 113/111R	BLK	6.0	9.5	11.8	216	728	475/69	E	C	72
225/65R16C 112/110T	BLK	6.5	9.5	11.8	228	698	475/69	E	C	72
235/65R16C 115/113R	BLK	7.0	9.5	11.8	240	712	475/69	E	C	72
165R13C 91/89R	BLK	7.0	9.5	11.8	240	712	475/69	E	C	72

* New Developing Sizes
The labeling information is subject to change without notice.

MAXTOUR



① Reinforced structure and special abrasion resistant tread compound deliver extra puncture resistance and load bearing capability with more mileage.



② Three main zigzag grooves combined with lateral blocks provide excellent ride stability and great traction on all kinds of road conditions.



③ Continuous tread patterns on shoulder and solid shoulder ribs responsive handling and even wear.



④ White sidewall rib shows extraordinary appearance.



Sizes	Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
155R13C	85/83R	RBL	4.5	8.0	10.0	157	578	350/51	-	-	-
155R13C	90/88R	RBL	4.5	8.00	10.0	157	578	450/65	-	-	-
185R14C	102/100R	WSW	5.5	8.50	10.8	188	650	450/65	-	-	-
195R14C	106/104R	WSW	5.5	8.50	10.8	198	666	450/65	-	-	-
205/75R14C	109/107R	WSW	5.5	8.50	10.8	203	664	475/69	-	-	-
185R15C	103/102R	WSW	5.5	8.50	10.8	188	674	450/65	-	-	-
195R15C	106/104R	WSW	5.5	8.50	10.8	198	693	450/65	-	-	-
205/75R15C	109/107R	WSW	5.5	8.50	10.8	203	689	475/69	-	-	-

The labeling information is subject to change without notice.

PRIMA



UTQG: 420 AB



① Four main grooves provide good driving stability and wet performance.



② Reasonable pattern area, protect collocation of every groove.



③ Special tread compound, ensure tire performance stability in all kinds of weather conditions.



④ White sidewall rib shows extraordinary appearance.



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
*P195/75R14 92S	WSW	5.0	8.50	10.8	196	648	300/44	-	-	-
*P205/75R14 95S	WSW	5.5	8.50	10.8	203	664	300/44	-	-	-
*P205/70R15 95S	WSW	6.0	8.50	10.8	209	669	300/44	-	-	-
P205/75R15 97T	WSW	5.5	8.50	10.8	203	689	300/44	-	-	-
P215/75R15 100T	WSW	6.0	8.50	10.8	216	703	300/44	-	-	-
P225/70R15 100T	WSW	6.5	8.50	10.8	228	697	300/44	-	-	-
P225/75R15 102T	WSW	6.0	8.50	10.8	223	719	300/44	-	-	-
P235/75R15 105S	WSW	6.5	8.50	10.8	235	733	300/44	-	-	-

* New Developing Sizes
The labeling information is subject to change without notice.

GRAND ATZ2



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
275/65R17 115H	BLK	8.0	8.5	10.8	279	791	300/44	E	C	72
285/65R17 116H	BLK	8.5	8.5	10.8	292	802	300/44	E	C	72
285/60R18 116H	BLK	8.5	8.5	10.8	290	802	300/44	E	C	72



CROUSER T528



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
275/70R16 114H	BLK	8.0	8.5	10.8	279	792	300/44	E	C	72

BIRD STONE C890



Sizes	Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
205R16C	110/108S	RBL	5.5	8.5	14.4	200	738	375/55	E	C	71
255/70R15C	112S XL	RBL	5.0	9.5	14.4	200	738	375/55	E	C	72
255/70R15C	108T	RBL	5.0	9.5	14.4	200	738	375/55	E	C	72
205/80R16	104S XL	RBL	5.5	9.5	14.4	200	738	375/55	E	C	72

GRAND PTZ



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
285/50R20 116VXL	BLK	9.0	8.0	10.8	297	794	340/50	E	C	72



LIBERTY HT



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
215/70R16 100H	BLK	6.5	8.5	10.8	221	708	300/44	E	C
225/70R16 103H	BLK	6.5	8.5	10.8	228	722	300/44	E	C
235/65R18 110HXL	BLK	7.0	8.5	10.8	240	763	340/50	E	C
245/60R18 105H	BLK	7.0	8.5	10.8	248	751	300/44	E	C
255/70R18 113H	BLK	7.5	8.5	10.8	260	815	300/44	E	C
265/70R18 116H	BLK	8.0	8.5	10.8	272	829	300/44	E	C
275/65R18 116H	BLK	8.0	8.5	10.8	279	815	300/44	E	C
255/50R20 109VXL	BLK	8.0	9.0	10.8	265	764	340/50	E	C
265/50R20 111VXL	BLK	8.5	9.0	10.8	277	774	340/50	E	C
285/50R20 116V XL	BLK	9.0	9.0	10.8	284	794	340/50	E	C
LT265/75R16 123/120S	BLK	6.5	9.0	10.8	294	764	340/50	E	C



LIBERTY HP



Sizes	Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
255/60R17	110V XL	BLK	7.5	8	10	260	738	340/50	E	C
235/55R19	105VXL	BLK	7.5	8	10	245	741	340/50	E	C
275/35ZR20	102WXL	BLK	8.0	8	10	265	738	340/50	E	C
255/35ZR20	97WXL	BLK	8.0	8	10	265	705	340/50	E	C
275/40R20	106VXL	BLK	9.5	8	10	278	728	340/50	E	C
275/45R20	110VXL	BLK	9.0	8	10	273	756	340/50	E	C
275/55R20	117VXL	BLK	9.5	8	10	248	738	340/50	E	C
245/45ZR20	103WXL	BLK	9.0	8	10	240	763	340/50	E	C
275/60R20	119V XL	BLK	9.5	8	10	273	756	340/50	E	C



LIBERTY MAX



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
185/75R16C 104/102R	BLK	5.0	9.0	11.4	184	684	475/69	E	C




SAND TYRE



① Suitable operating on sand ground and loose road surface, desert area. Made in Taiwan.



② The combination of wide tread, round shoulder and streamlined pattern design with uniform tread provide good floatation performance, stable ride, good floating force, excellent steering ability on sand ground road surface.



③ A kind of tire most suitable for use in desert and on loose road.



Sizes	Description	LI/SI	Sidewall	RIM	Tread Depth	RR	WG	SL
900-15		107K	BSW	7.0	10.8mm	-	-	-
900-16		107K	BSW	7.0	10.8mm	-	-	-
900-17		107K	BSW	8.0	8.5mm	-	-	-
900-18		118/116M	BSW	8.0	8.5mm	-	-	-
820-15		117/115M	BSW	6.0	7.5mm	-	-	-
825-16		107K	BSW	6.5	8.5mm	-	-	-
825-17		107K	BSW	6.5	8.5mm	-	-	-
825-18		118/116M	BSW	6.5	12.5mm	-	-	-

GRANDSNOW (WINTER TYRE)



Sizes	Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
175/65R14	82T	BLK	5.0	7.5	10.0	177	584	340/44	E	C
185/65R14	86T	BLK	5.5	7.5	10.0	189	609	340/44	E	C
185/65R15	88H	BLK	5.5	8.0	10.0	189	621	340/44	E	C
195/60R15	88H	BLK	6.0	8.0	10.8	201	615	340/44	E	C
205/60R16	96HXL	BLK	6.0	8.0	10.8	209	652	340/44	E	C
215/60R16	99HXL	BLK	6.5	8.0	10.8	221	664	340/44	E	C
215/65R16	98H	BLK	6.5	8.0	10.8	221	686	340/44	E	C
225/60R16	98H	BLK	6.5	8.0	10.8	228	676	340/44	E	C
265/65R17	112T	BLK	8.0	8.0	10.8	272	776	340/44	E	C



SNOWPEARLY (WINTER TYRE)



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
185/60R14 82T	BLK	5.5	7.5	9.4	189	578	300/44	E	C
195/50R15 82H	BLK	6.0	8.0	10.0	201	577	300/44	E	C
195/55R15 85H	BLK	6.0	8.0	10.0	201	595	340/50	E	C
195/65R15 91T	BLK	6.0	8.0	10.0	190	619	340/50	E	C
205/55R16 94HXL	BLK	6.5	8.0	10.0	214	632	340/50	E	C
215/55R16 97HXL	BLK	7.0	8.0	10.0	226	642	340/50	E	C
205/50R17 93HXL	BLK	6.5	8.0	10.0	214	638	340/50	E	C
215/50R17 95HXL	BLK	7.5	8.0	10.0	226	648	340/50	E	C
215/55R17 98HXL	BLK	7.0	8.0	10.0	226	668	340/50	E	C
225/45R17 94HXL	BLK	7.5	8.0	10.0	225	634	340/50	E	C
225/50R17 98HXL	BLK	8.0	8.0	10.0	233	658	340/50	E	C
225/55R17 101HXL	BLK	7.0	8.0	10.0	233	680	340/50	E	C
235/45R17 97HXL	BLK	7.5	8.0	10.0	236	644	340/50	E	C
235/55R17 103HXL	BLK	7.5	8.0	10.0	245	690	340/50	E	C
225/40R18 92HXL	BLK	8.0	8.0	10.0	230	637	340/50	E	C
245/45R18 100HXL	BLK	8.0	8.0	10.0	243	677	340/50	E	C
235/55R18 104HXL	BLK	7.5	8.5	10.8	245	715	340/50	E	C
235/60R18 107HXL	BLK	7.0	8.5	10.8	240	739	340/50	E	C
245/60R18 105H	BLK	8.0	8.5	10.8	265	737	340/50	E	C
255/55R18 109HXL	BLK	8.0	8.5	10.8	265	738	340/50	E	C
255/50R19 107HXL	BLK	8.0	8.5	10.8	265	763	340/50	E	C
255/55R19 111HXL	BLK	8.0	8.5	10.8	265	728	340/50	E	C
275/40R20 106HXL	BLK	9.5	8.5	10.8	278	756	340/50	E	C
275/45R20 110HXL	BLK	9.0	8.5	10.8	273	756	340/50	E	C

SE306 (SAND TYRE)



Sizes	Description	LI/SI	Sidewall	RIM	Tread Depth	RR	WG	SL
825-16	(RIB)	117/115L	BSW	6.5	13mm	-	-	-
825-17		118/116M	BSW	6.5	12.5mm	-	-	-

SHAHIN



Sizes Description	Sidewall description	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG
225/95R16C 10PR TL	BLK	6.0	8.55	10.8	240	738	340/50	E C 71
235/85R16LT-8PR TL	BLK	6.0	8.55	10.8	240	738	340/50	E C 72
245/85R16LT-8PR TL	BLK	6.5	8.55	10.8	240	738	340/50	E C 72
9.00R15LT- 6PR TL	BLK	5.5	8.55	10.8	240	738	340/50	E C 72
9.00R16LT- 6PR TL	BLK	6.0	8.55	10.8	240	738	340/50	E C 72
9.00R17LT- 6PR TL	BLK	7.0	8.55	10.8	240	738	340/50	E C 72
9.00R18LT- 8PR TL	BLK	8.0	8.55	10.8	240	738	340/50	E C 72



T-REX (T02)



① Four main rib design provide good performance of avoiding slippery.

② Pitched and big pattern design reduces driving noise and greatly improve cornering stability at high speed.

③ Straight lined central rib design improves maneuverability highly.

Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
265/75R16 10PR A/T	BLK	7.0	8.5	10.8	240	738	340/50	E	C	71
285/70R17 10PR A/T	BLK	7.0	8.5	10.8	248	750	300/44	E	C	72
285/70R18 10PR A/T	BLK	8.0	8.5	10.8	260	738	340/50	E	C	72
225/75R16 10PR A/T	BLK	8.0	8.5	10.8	260	764	300/44	E	C	72
235/75R16 10PR A/T	BLK	7.0	8.5	10.8	272	776	300/44	E	C	72
265/65R17 10PR A/T	BLK	7.0	8.5	10.8	265	737	340/50	E	C	72
285/60R18 10PR A/T	BLK	8.0	8.5	10.8	265	737	340/50	E	C	72
285/65R17 10PR A/T	BLK	8.0	8.5	10.8	265	739	340/50	E	C	72

SM VAN 365



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
195R15C-8PR TL	BLK	5.0	8.55	10.8	240	738	340/50	E	C	71



ST3



LTR Tyres

Size	Ply	Stand Rim	Load Index/Speed Rating	Maximum Single-Tyre		Maximum Double-Tyre		Pressure	
				KG	LBS	KG	LBS	KPA	PSI
700R16C	12	5.50F	115/110N	1215	2679	1060	2337	2337	97
750R16C	14	6.00G	122/118L	1500	3305	1320	2910	2910	112



TABOUQ



LTR Tyres

Size	Ply	Stand Rim	Load Index/Speed Rating	Maximum Single-Tyre		Maximum Double-Tyre		Pressure	
				KG	LBS	KG	LBS	KPA	PSI
750R16LT	8PR	6.00G	112/107R	1120	2470	975	2150	460	67



R632



Size	Ply	Stand Rim	Load Index/Speed Rating	Maximum Single-Tyre		Maximum Double-Tyre		Pressure	
				KG	LBS	KG	LBS	KPA	PSI
205/70R15C	8	6J	106/104R	950	2095	900	1985	450	65



SS1



LTR Tyres

Size	Ply	Stand Rim	Load Index/Speed Rating	Maximum Single-Tyre		Maximum Double-Tyre		Pressure	
				KG	LBS	KG	LBS	KPA	PSI
750R16LT	8PR	6.00G	112/107R	1120	2470	975	2150	460	67
750R16LT	10PR	6.00G	116/111S	1120	2470	975	2150	460	67



SS2



LTR Tyres

Size	Ply	Stand Rim	Load Index/Speed Rating	Maximum Single-Tyre		Maximum Double-Tyre		Pressure	
				KG	LBS	KG	LBS	KPA	PSI
750R16LT	8PR	6.00G	112/107S	1120	2470	975	2150	460	67
750R16LT	10PR	6.00G	116/111S	1120	2470	975	2150	460	67



DESERT TIRES



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
32-15	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

E7



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
1400-20- 18PR	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

JUPITER



① Four main rib design provide good performance of avoiding slippery.

② Pitched and big pattern design reduces driving noise and greatly improve cornering stability at high speed.

③ Straight lined central rib design improves maneuverability highly.

Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
205/55R16 91V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
215/55R17 94V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/50R17 94V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/55R17 97V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
235/35ZR19 91YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
235/55R19 105V	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
245/35ZR20 95YXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
245/40ZR19 98YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
245/45ZR18 100WXL	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
245/45ZR19 102WXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
255/35ZR19 96YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
275/35ZR20 102YXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
205/55ZR17 95WXL	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/40ZR18 89WXL	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
225/40ZR19 93YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
225/50ZR18 99WXL	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72

235/40ZR19 96YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
245/40ZR20 99YXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
255/40ZR19 100YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
255/45ZR19 104WXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
265/30ZR19 93YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
265/40ZR21 105YXL	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72
265/45ZR20 108WXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
265/45ZR21 104Y	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72
275/30ZR20 97YXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
275/40ZR19 105YXL	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
275/55ZR19 111W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
285/35ZR21 105YXL	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72
285/45ZR22 114YXL	BLK	12.0	8.55	10.8	240	738	340/50	E	C	72
325/30ZR21 108YXL	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72

GALAXY



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
185/65R15 88H	BLK	5.0	8.55	10.8	240	738	340/50	E	C	72
195/65R15 91H	BLK	5.0	8.55	10.8	240	738	340/50	E	C	72
205/60R16 92V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
215/60R16 95V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
185/60R15 84H	BLK	5.0	8.55	10.8	240	738	340/50	E	C	72

KASMAS



① Four main rib design provide good performance of avoiding slippery.

② Pitched and big pattern design reduces driving noise and greatly improve cornering stability at high speed.

③ Straight lined central rib design improves maneuverability highly..

Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
225/55R18 98V	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
225/60R17 99H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
235/55R18 100V	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
235/60R18 107H	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
245/45R20 103VXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
245/60R18 105H	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
245/65R17 107H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
265/60R18 110H	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
265/65R17 112T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
265/70R18 116T	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
215/60R17 96H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
235/55R20 105VXL	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
245/50R20 102V	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
265/65R18 114T	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
275/45ZR21 110WXL	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72

PREMIUM SILENT 1



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
275/50ZR22 111Y	BLK	12.0	8.55	10.8	240	738	340/50	E	C	72
275/50ZR21 113WXL	BLK	11.0	8.55	10.8	240	738	340/50	E	C	72



RUBICON



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
31*10.50R15LT 109Q	BLK	5.0	8.55	10.8	240	738	340/50	E	C	72



ST LANDTOUR



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
275/60R20 115 H	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
275/40ZR22 107/XL W	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
265/45R21 104 W	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
285/45R22 114/XL V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
275/50R22 111 V	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72

ST GRANDTOUR



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
31x10.50R15LT 109 S	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

STC NEXA



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
215/70R15C 109/107 S	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
205/65R16C 107/105 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/65R16C 109/107 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
235/65R16C 115/113 T	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

LTX LANDTOUR



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
285/50R20 116/XL V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
235/60R16 100 V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/70R16 100 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/70R16 103 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/65R17 102 V	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
235/60R17 102 H	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
265/65R17 112 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
265/70R17 115 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
275/65R18 116 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
275/50R21 113/XL W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72

ST MAX270



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
175/65R14 82 T	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
175/70R14 84 T	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
185/60R14 82 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
185/60R15 88/XL V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
185/65R15 88 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
195/55R15 85 V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
195/60R15 88 H	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
195/65R15 91 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
185/55R16 83 V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
195/55R16 87 V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
205/55R16 91 V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/60R16 95 H	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/65R16 98 V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
225/60R16 98 V	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72



ST MAX071



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
195/50R15 82 V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

PREMIUM ST49



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
255/50ZR19 107/XL W	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

ST MAX247



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
195/60R14 195/60R14	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
205/60R14 205/60R14	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
215/75R15 215/75R15	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72

GRANDTOUR GT



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
265/55R20 113/XL V	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72

PREMIUM ST52



Sizes Description	Sidewall description	RIM	MM	1/32"	width MM	OA.diameter MM	Max pressure Kpa/PSI	RR	WG	SL
215/45ZR17 91/XL W	BLK	6.0	8.55	10.8	240	738	340/50	E	C	72
215/50ZR17 95/XL W	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/45ZR17 94/XL W	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/50ZR17 98/XL W	BLK	7.0	8.55	10.8	240	738	340/50	E	C	72
225/45ZR18 95/XL W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
205/50ZR17 93/XL W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
205/55ZR17 95/XL W	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72
215/55ZR17 98/XL W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
235/55ZR17 103/XL W	BLK	8.0	8.55	10.8	240	738	340/50	E	C	72
245/40ZR18 97/XL W	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
265/50R20 111/XL V	BLK	9.0	8.55	10.8	240	738	340/50	E	C	72
195/45R16 84/XL V	BLK	10.0	8.55	10.8	240	738	340/50	E	C	72

SEAM BATTERY

The Power of Drive

Calcium Calcium



DIN




JIS



DRY

Technical File

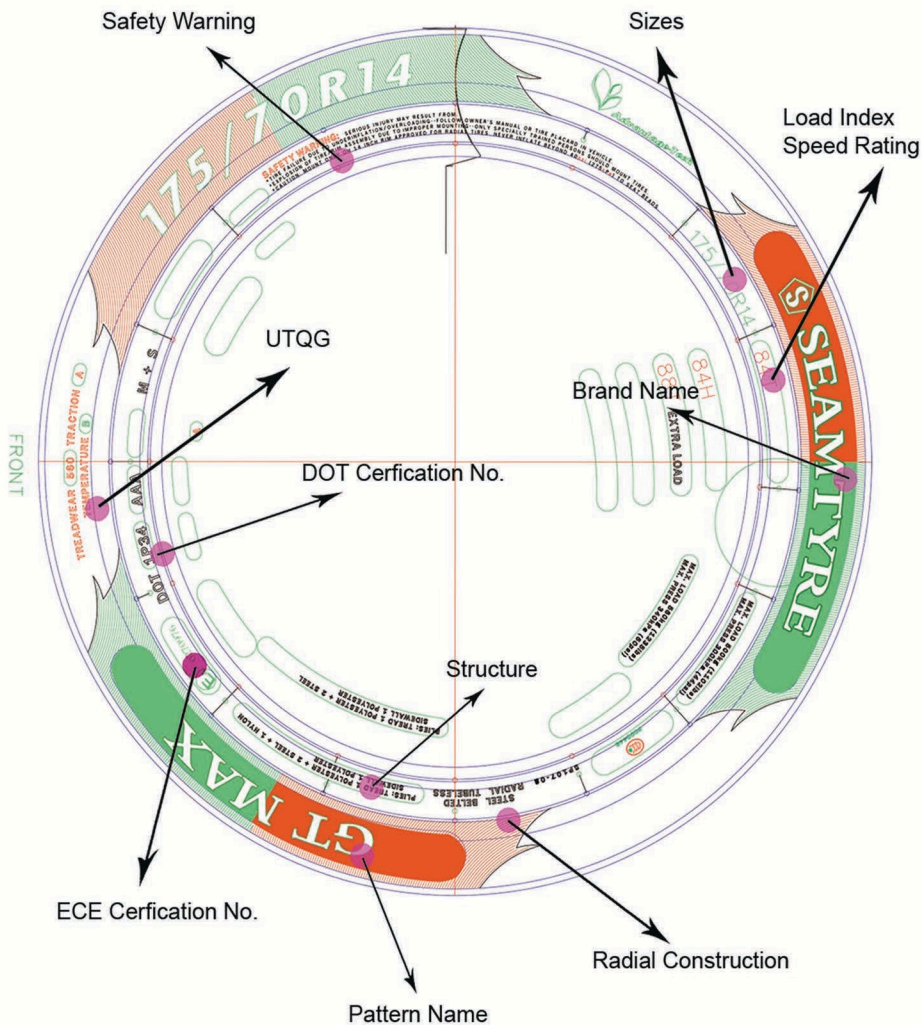

CERTIFICATES




ISO9001



DOT



ECE



SONCAP



REACH



GCC




ISO-TS16949



COP



INMETRO

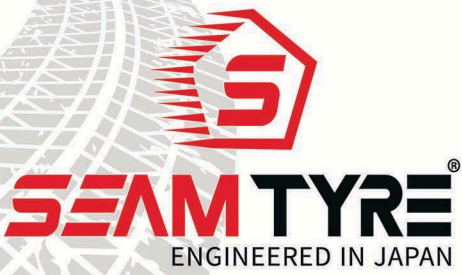

SEAM BATTERY
The Power of Drive



AL NOUF AUTO
TYRES & ACCESSORIES

+971 6 530 3584 +971 6 530 3586

+971 55 956 1981 / +971 52 76 44 333

P.O.Box: 72581 Sharjha U.A.E

anc.tire@yahoo.com www.alnouf.com